

SE122 - Bioplastic for Sheet Extrusion



Photo Credit 1Brigo and Inplastor

SE122 is a bioplastic based on PLA, suitable for use in a variety of sheet extrusion applications. The formulation is based on a very high proportion of renewable raw materials, which allows for a reduction in carbon footprint by up to 80% compared to conventional fossil-based plastics.

Environmental Benefits

SE122 has been developed to be a sustainable alternative to fossil-based plastic for injection molding. A high proportion of the raw material comes from renewable sources.


According to life cycle assessment calculations (LCA), SE122 has a global warming potential (GWP) of 0.85 kg CO₂ eq./kg of manufactured material (cradle-to-gate)*. This is significantly lower than conventional plastic (see diagram below) and shows how switching to BIQ Materials SE122 noticeably reduces the CO₂ footprint of your company's products. Our ambition is to continuously reduce the environmental footprint of our materials, with the goal of reducing GWP to -0.18 kg CO₂ eq./kg of manufactured material by 2030.

Please contact us to discuss how you can improve the environmental profile of your products.

* The CCaLC2 software, version 1.7, and its database were used to perform this life cycle analysis.

- + Up to 80% lower CO₂ footprint
- + High proportion of renewable content
- + Recyclable
- + Free from permanent microplastics
- + Flexible

Global Warming Potential for SE122 Compared to Conventional Plastic

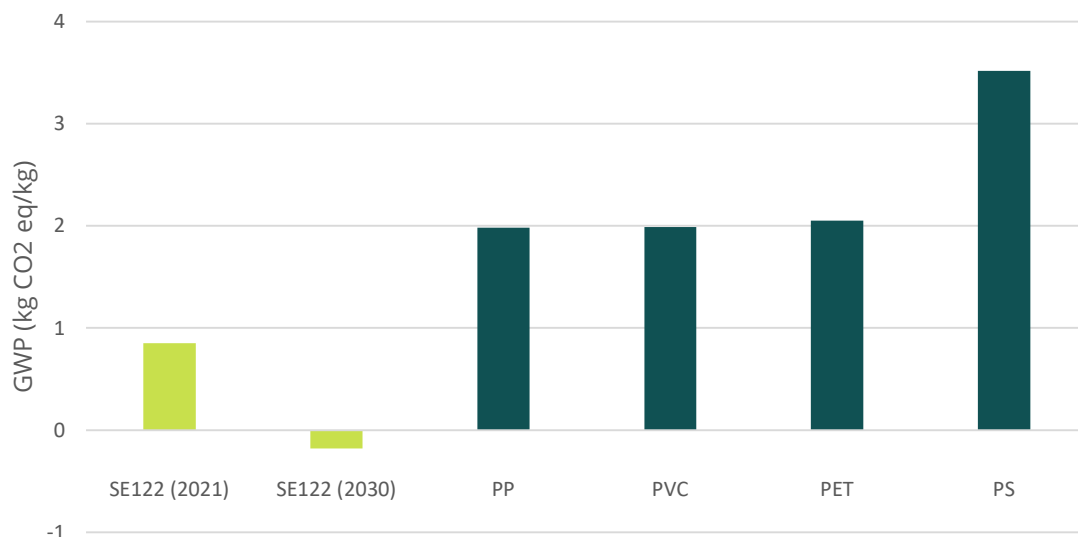

Recyclable and Biodegradable

SE122 is biodegradable but can also be recycled or incinerated, thus having many ways to complete the carbon cycle when its usage period is over. Through recycling, the carbon footprint can be further reduced. In this way, it is a good material choice for companies that want to mark their transition towards a circular economy with a reduced environmental footprint. Compared to conventional plastics, PLA breaks down as carbon dioxide and water over time in the environment. If it ends up in nature, it does not leave any permanent microplastics behind.



An Easy Transition

SE122 stands out with well-balanced mechanical properties for sheets and plates combined with good processability. It can replace fossil-based plastic in many different tools and applications, which both simplifies and reduces the cost of transitioning to bioplastic. Please contact us, and we will help your company make the switch.

Technical Data

The table below shows a selection of properties for SE122

Parameter	Value	Unit	Method
Color	Easy to color	-	-
Density	1,30	Kg/dm ³	ISO 1183
Melt Flow Index (190 °C; 2,16 kg)	2	g/10	ISO 1133
Melting Temperature	155	°C	Internal
E-modulus	2000 (sheet 400µm)	MPa	ISO 527
Proportion of Renewable Raw Material	80*	%	Internal

*The remaining content consists of non-bio-based but biodegradable polymers and processing aids.